



Anbauanleitung für Spulenbeleuchtung Fitting instructions for bobbin lamp

Teile Nr./
Part No.:

0791 867709

Allgemeines

Die Spulenbeleuchtung ist Zusatzausstattung. Der Anbausatz "Spulenbeleuchtung" ist für diverse Unterklassen der **KI. 867** vorgesehen.



Achtung !

Der Anbau darf nur bei ausgeschalteter Nähmaschine erfolgen.
Vor dem Anschließen des Trafos, Stecker rausziehen!

1 Anbausatz

Der komplette Bausatz zum Anbauen der Spulenbeleuchtung mit der Bestell-Nr. **0867 591244** besteht aus folgenden Komponenten:

Leuchte	0867 591254
Zylinderschr.	9202 002077
Scheibe	9330 000087
Kabelhalter	9840 120106
Kabelbinder	9840 121001

Hinweis

Damit die Spulenbeleuchtung optimal funktioniert, sind folgende Komponenten zusätzlich nötig:

Schieber mit Schauglas
Spulengehäuse mit Loch
Spule mit Löchern
(Netzteil bei älteren Maschinen)

Alle Teile werden abhängig von der vorhandenen Ausstattung der KI. 867 benötigt.






Beispiel: KI. 867-190142

Schieber rechts	0867 140203
Spulengehäuse V.	0667 156014
Spule	0867 150150
(Netzteil	9850 001083)



2 Montage

- Rechten Schieber **1** öffnen
 - Leuchte **2** mit Zylinderschraube und Scheibe **3** an Greiferlager **4** montieren
 - Anschlusskabel nach unten führen
-
- Nähkopf kippen und Kabelhalter **5** in die Grundplatte eindrücken
 - Anschlusskabel **6** mit Kabelbindern an den Kabelhaltern **5** befestigen
-
- Handrad, Riemenschutz und Ventildeckel demontieren
 - Anschlusskabel **6** durch Kabelhalter **7** führen
-
- Anschlusskabel **6** an Kabelbaum befestigen und bis zum Netzteil **8** führen
-
- Einen Stecker des Anschlusskabels **6** mit dem Stecker des Netzteils **8** verbinden
 - Den anderen Stecker des Anschlusskabels **6** an den Kurzschlussstecker **9** anschließen (sonst kann 1-LED Nähleuchte 1W 9880 867103 angeschlossen werden)

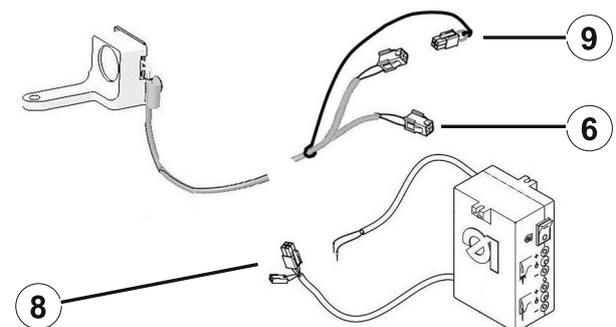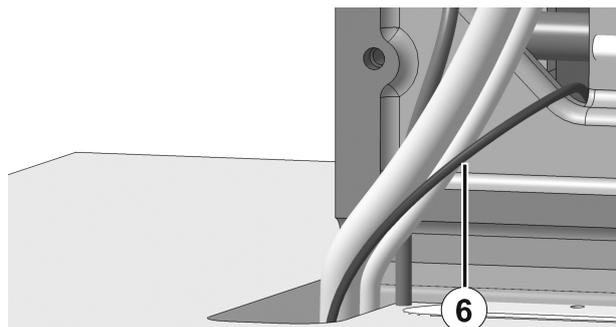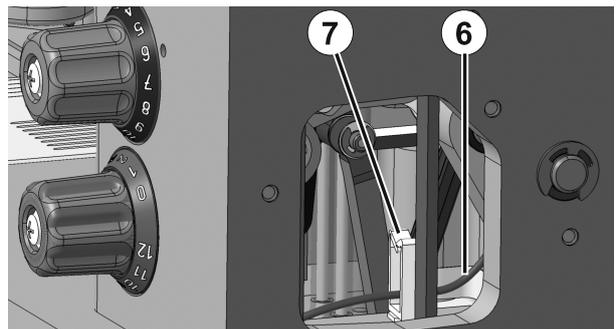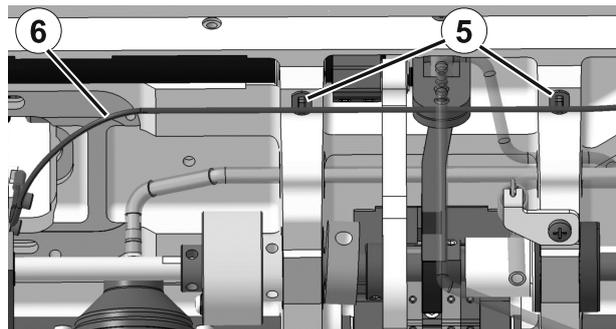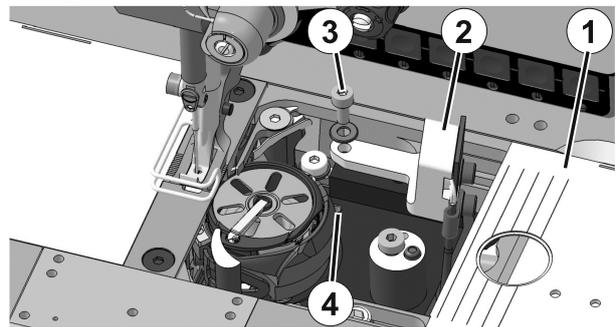



Anbauanleitung für Spulenbeleuchtung
Fitting instructions for bobbin lamp

Teile Nr./
Part No.:

0791 867709

General

The bobbin lamp is optional equipment. The kit "bobbin lamp" is designed for various subclasses of **cl. 867**.



Attention !

Perform the conversion only with the sewing machine switched off.
Pull out the mains plug before connecting the transformer!

1 Mounting kit

The complete kit for mounting the bobbin lamp with the order number **0867 591244** consists of the following components:

Lamp	0867 591254
Head screw	9202 002077
Washer	9330 000087
Cable holder	9840 120106
Cable tie	9840 121001

Notice

So that the bobbin lamp has the ideal functionality, the following components are necessary:

Slider with sight glass
Bobbin case with hole
Bobbin with hole
(Transformator for older machines)

All parts which are needed depend on the equipment of the cl. 867.


Example: KI. 867-190142

Slider right	0867 140203
Bobbin case V.	0667 156014
Bobbin	0867 150150
(Transformator	9850 001083)




2 Assembly


- Open the right slider **1**
- Mount lamp **2** with head screw and washer **3** on hook bearing mounting **4**
- Guide the connecting cable downwards

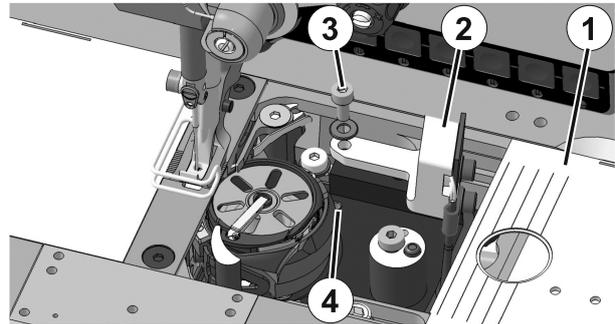


- Tilt the sewing head and press the cable holder **5** in the bed plate
- Fix the connecting cable **6** with cable ties at the cable holder **5**

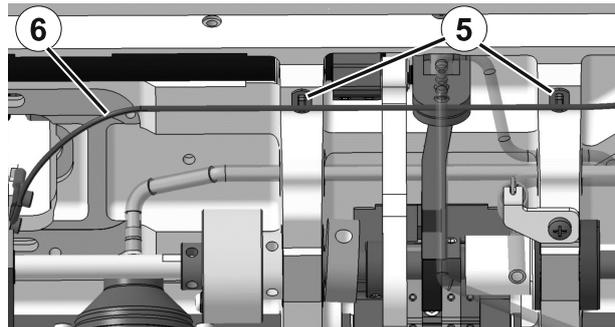

- Remove hand wheel, belt guard and valve cap
- Guide connecting cable **6** through the cable holder **7**

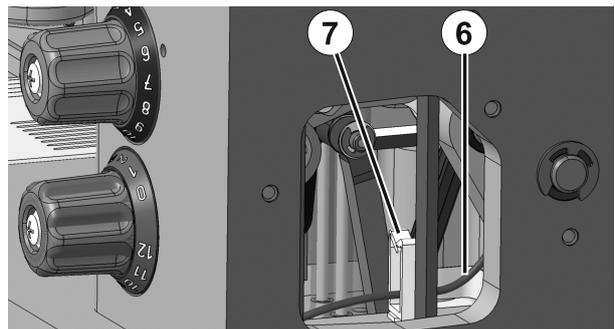

- Guide the connecting cable **6** to the transformer **8** and fix it at cable harness

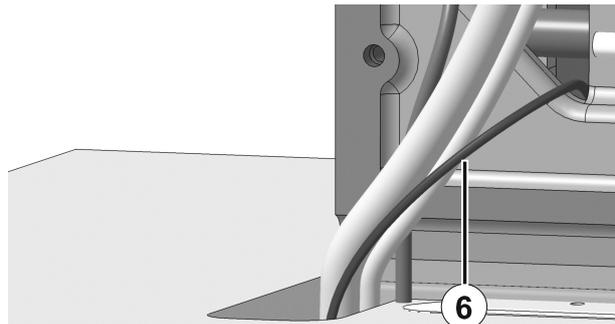

- Join one plug of the connecting cable **6** with the connector of the transformer **8**
- Connect the other plug of connecting cable **6** with the short circuit plug **9** (otherwise 1-LED sewing lamp 1W 9880 867103 can be connected)

